

# Resources Reservation Satisfying QoS Constraints for Ad Hoc Networks

Hassene Bouhouch

SecNum Laboratory Research, Sup'Com  
High School of Communication Sup'Com,  
University of the 7th of November at Carthage, Tunisia  
hassene\_bouhouche@yahoo.fr

Sihem Guemara El Fatmi

SecNum Laboratory Research, Sup'Com  
High School of Communication Sup'Com,  
University of the 7th of November at Carthage, Tunisia  
Sihem.guemara@supcom.rnu.tn

**Abstract**— For the last several years, there has been a significant increase of interest in supporting quality of service (QoS) constraints in Mobile Ad Hoc Networks (AHNs). AHNs include mobile nodes with limited capacities and communication resources. This specificity makes existing solutions for wired networks little suitable and a broad range of novel approaches have been studied. In this paper we propose a QoS reservation mechanism for AHNs, called QSRR. The mechanism is targeted for sources requiring a bandwidth allocation. It is based on the knowledge of the bandwidth requirements of the neighbours of a node and the interfering nodes in the cover area of each node. Our proposition uses a traffic classification and requires available bandwidth estimation definition. The advantages of this proposition are shown thanks to some simulation results that are detailed in the end of this paper.

**Keywords** : *resources reservation mechanism, bandwidth allocation, quality of service, Ad Hoc networks*

## I. INTRODUCTION

With the advancement of mobile devices, mobile applications and the deployment of AHNs in emergency rescue and military battlefields, the need to support real time communication or multimedia communication (voice, video) over AHNs have increased. These types of communication require QoS constraints like minimum bandwidths, maximum end-to-end delays, tolerable jitters...

QoS provisioning in AHNs is a challenging task. A AHN is a very complex distributed network where the nodes move in a free way making the topology of the network dynamic. Nodes moving do not only change the topology of the network but also cause dynamic changes in the traffic load. Moreover a node can act simultaneously as a source, a destination or an intermediate node. Others AHNs characteristics defy the QoS constraints that can be required by applications. One can mention bandwidth capacity and mobile device limitations like battery power

and processing power. Again, QoS provisioning should not put much load on the nodes and should not increase the volume of information to be maintained to support QoS in AHNs. The elaboration of an adequate resource allocation mechanism in AHNs must take into account the mobility of the nodes and their characteristics and those of the physical medium. The complexity of such aspects is greatly increased when the quality of service (QoS) required by the AHN users is considered.

This paper is organized as follows: the Ad Hoc mobile environment's is very particular and the AHNs unit's constraints are very strong, we think it right to study in the second section of this paper these particularities. This section also deals with the concept of QoS in AHNs and details the classes of traffic (Real Time/ Best Effort). The third section of this paper defines the process of the available bandwidth estimation and proposes functions which quantitatively define the available bandwidth quantities. Section 4, exposes a novel proposition of resources reservation mechanism, called QSRR that takes into account the QoS challenge by defining a relation between the required constraints of the applications. In section 5, we expose the simulation results. Section 6 concludes this paper.

## II. QUALITY OF SERVICE IN AD HOC NETWORKS

In this section we study the Ad Hoc networks environment's and the mobile unit's characteristics, the concepts of QoS in AHNs and finally we details the classes of traffic.

### A. The Ad Hoc Networks characteristics

AHNs started with the aim to have the ability to establish a network among willing nodes without the assistance from any network infrastructure. AHNs are defined as a 'collection of mobile entities interconnected by a wireless technology forming a temporary network without the assistance of any administration or any fixed support where no centralized administration is available' [1].

Contrary to a cellular network, they are the mobile hosts themselves which form, in an ad hoc way, the network infrastructure. This ability to establish this type of network seems to be very promising in situations like disaster or war (where the infrastructure is damaged or not available) or in areas where building the infrastructure is not possible or situations where an AHN is more suitable than an infrastructure network.

AHNs, which are based on IEEE 802.11 standard, are characterized by several limits and constraints [2] such as limited and shared bandwidth, limited energy, poor security, and so on. These characteristics make big differences between AHNs functioning and the one of traditional wired networks. In fact, dynamic topology and nodes arbitrary mobility can aggravate these difficulties especially because of the fast movements of the nodes and the variable conditions of the network which make the information of the network's state, obsolete quickly. Because of these characteristics, AHNs suffer of several problems such as the routing, the management of the mobility, the security, the quality of service and essentially what most interests us, the resources reservation. In fact, the resources reservation process constitutes one of the more illustrative and the more heavy examples of such differences between AHNs functioning and the one of traditional wired networks.

#### B. *Quality of Service in Ad Hoc Networks*

The QoS provided by a network constitutes nowadays an important issue for advanced applications because it concerns the different needs and constraints characterizing these applications. From the part of the network, it indicates its capacity to transport, under good conditions, flows resulting from various applications and various users [3]. Generally, it expresses a measure of the level of service that a particular data gets in the network. The basic idea behind 'provided' service is to differentiate between traffic coming into the network and provide preferential treatment to some types of data (Real Time applications). QoS also expresses a measure of performance and/or user satisfaction relative to a transmission system that reflects its transmission quality and availability of service.

The QoS can be defined as the manner that the service of delivery of packages is supplied and who can be characterized by various parameters of performance like the availability, the rate of errors, the response time, the delay, the throughput, the delay variation (jitter), the packet loss etc [4]. Unlike fixed networks, quality of service (QoS) support in AHNs depends not only on the available resources in the network but also on the mobility rate of such resources. This is because mobility may result in link

failure which in turn may result in a broken path. Furthermore, AHNs potentially have less resource than fixed networks. Therefore, more criterions are required in order to capture the quality of the links between nodes.

We believe for AHNs, with time-varying low-capacity resources, the notion of being able to guarantee hard QoS is not plausible. Instead, applications must adapt to time-varying low-capacity resources offered by the network. Therefore, the QoS that an application requires depends on the "quality" of the network. This "quality" should be a function of available resources resides both in the wireless medium and in the mobile nodes in the network as well as the stability of such resources. Hence, QoS in AHNs could mean to provide a set of parameters in order to adapt the applications to the "quality" of network while routing them through the network.

Several architectures and techniques for the QoS provision have been defined and have been adopted for several types of networks. These techniques and architecture can not be applied in an AHN environment because of the particular characteristics of such networks such as the host functioning and the limited resources availability. Providing QoS in AHNs has its own challenges and problems. For the QoS in the AHNs, some major networks aspects characterize a QoS expressed by a user or delivered by a network [5]. They are (1) the delay, (2) the resource availability and/or capacity, (3) the reliability, the bandwidth (4) and the rate of errors (5). We still speak about 'Capacity of the network'.

#### C. *Traffic classes*

We have considered three classes of traffic according to the applications QoS requirements. One on these classes has no QoS constraints [6]. The two others have strong temporal constraints and one of them has in addition strong bandwidth constraints. The three classes can be detailed as follows:

- Class 0: Real Time traffic Delay sensitive (CBR) generated by applications having strong temporal constraints: each bandwidth allowing the requested delay is acceptable by such traffic class. This class represents for example multimedia applications.

- Class 1: Real Time traffic Bandwidth sensitive (VBR\_RT) generated by applications having strong temporal constraints in addition to strong constraints in terms of bandwidth. A traffic generated by a video on demand application can be represented by a class 1.

- Class 2: Best Effort Traffic (BE) generated by applications having no QoS constraints. For example a Web surfing application generated traffic of class 2.

### III. AVAILABLE BANDWIDTH ESTIMATION

In AHNs, available bandwidth in each node depends both of his consumption, the consumption of all his direct neighbours and the interferences caused by all these transmissions. Otherwise, one application can not optimize its transmission without having a precise idea of the complete state of his neighbourhood in term of resources consumption. The available bandwidth estimation is a fundamental operation for a QoS offer [7]. This operation is very difficult because of the approximate acknowledge of the network state and the random mobility of nodes. For AHNs, this mechanism is generally placed in the MAC layer to allow the source to estimate the available bandwidth quantities. This estimation must to take into account node's mobility, interferences caused by the different transmissions and the hidden stations problem. The available bandwidth quantities must be permanently up to date especially after a congestion establishment or a reception of a duplicate acknowledgement (DUPACK).

Available bandwidth can be defined as the maximum throughput with which we can transmit (between two nodes) without interrupt flows transmitted on the Ad Hoc networks. This term must not to be confused with the 'link capacity' representing the maximum throughput which can attempt on this link, or with the 'unusable link capacity'. Knowledge of the available bandwidth quantity is required for admission control, QoS based routing, flow management and resources reservation [8]. Quantitatively, we define in our mechanism, QSRR, the available bandwidth quantity as:

-Let assume that BW (in bps) is the total bandwidth quantity on a node. The maximum available bandwidth quantity on a node can be defined by this function (1):

$$MAB(i) = BW(i) - x(i) - \sum_{j \in N_i} x(j) \quad (1)$$

Where: BW (i) = Total bandwidth on the node i,

x (i) = Used Bandwidth on the node i,

x (j) = Used Bandwidth by the node j neighbour of the node i,

Node j = neighbour of node i and

Ni = set of node i.

- On a link (i, j), the available bandwidth is expressed by the following expression (2):

$$AB(i, j) = \min \{MAB(i), MAB(j)\} \quad (2)$$

- For a path p= (S, i, j...k, D), where S: Source, D: Destination and i, j...k the intermediate nodes; we have the Maximum Available Bandwidth guaranteed on the path is done by the formula (3):

$$MAB(p) = \min \{MAB(S, i), MAB(i, j), \dots, MAB(k, D)\} \quad (3)$$

### IV. RESOURCES RESERVATION MECHANISM

AHNs resources reservation is a challenging task due to the lack of resources both in the wireless medium and in the mobile nodes as well as the frequent changes in network topology. As a result, resources reservation in such networks is more difficult than in wired networks. Moreover, in AHNs, it is essential to consider the quality of links and to take into account the time-varying topology and time-varying network resources. An important problem associated with resources reservation in AHNs is to employ methods that ensure the adequate QoS for the applications. The running of a service through an AHN will be interrupted, if an intermediate node belonging to the path moves out of range during data transfers. This interruption requires a subsequent path re-discovery between the source and the destination and invokes some path-maintenance algorithm that eventually increases the end-to-end delay. For instance, it is possible that a path that was earlier found to satisfy some QoS requirements no longer does so due to the dynamic nature of the topology. In such case, it is important that the network intelligently adapts the session to its new and changed conditions.

The goal of our QoS resources reservation method, QSRR, is two-folds: first reserving network path that have sufficient resources to satisfy the QoS requirements of all admitted connections and second achieving global efficiency in resource utilization. For each flow on which we have provided some QoS guarantee, QSRR will allocate some resources which will be exclusively for its use. This will ensure that as soon as the packet of that particular flow comes, it will not have to wait for some path or resource to be freed and it will be transmitted to the next node instantly. QoS-adaptation provides an interface for applications to submit their requirements. Some applications are capable to expand their QoS parameters, so that instead of being a single value indicating the constraints (in term of delay or throughput) needed by an application; it becomes a range of service classes in which the application can operate, together with the current reserved value within that range. This provides the network flexibility so that reservations can be maintained as network conditions change. Applications request QoS by specifying the minimum level of service they are willing to accept and the maximum level of service they are able to utilize, and then adapt to the specified point within this range that the network commits to provide, which may change with time. Changes in allocation have to be signalled to the application, which adapts its behaviour to match to what is available.

To offer bandwidth guaranteed QoS, the residual end-to-end bandwidth must be known. In wired networks this is

a trivial task since the underlying medium is a dedicated point-to-point link with fixed capability. However, in wireless networks the radio channel of every node is shared with all its neighbours. Due to the shared medium, a node can successfully use the channel only when all its neighbours do not transmit and receive packets simultaneously [9]. While the resources reservation is based on the available bandwidth, we use, in QSRR, an efficient method to obtain a relation between the required delay and the required bandwidth, as expressed in formula (4) and (5):

$$D_{req} = \frac{B_{req}}{B_{max} - (B_{res} + B_{req})} \quad (4)$$

$$B_{req} = \frac{D_{req} (B_{max} - B_{res})}{1 + D_{req}} \quad (5)$$

Where:

- $D_{req}$ : is the requested delay;
- $B_{req}$ : is the requested bandwidth
- $B_{max}$ : is the maximum bandwidth supported by a link, e.g.: 2 Mbps, 11 Mbps, or 54 Mbps;
- $B_{res}$ : is the residual (unused) bandwidth

## V. SIMULATION RESULTS

Once the proposed QoS-based resources reservation method's concepts have been completely defined, it becomes necessary to check their feasibility and evaluate their benefits. Simulation analysis is used here to evaluate the proposed scheme. The goal of this section is to present the main aspects of the simulation model and its results.

### A. Simulations Environnement

Two categories of parameters have been considered in our study: the input parameters and the output parameters. These parameters are as follows:

**Input parameters:** These include:

- Types of applications: CBR & VBR\_RT.
- Resources reservation mechanism: CSMA & QSRR.
- A number of nodes constituting our network: variable between 10 and 50 (interval of 5 nodes).

**Output parameters:** These include:

- Delay (sec), and,
- Throughput (packets/sec)

### B. Simulations Scenarios

For the applications type, we use: only CBR, or, only VBR\_RT, or, both CBR and VBR\_RT applications.

For the Resources Reservation Mechanism, we use: CSMA protocol, or, our QSRR mechanism.

The node number is varying between 10 and 50.

### C. Simulations Results

In this sub-section, we try to show that the performances provided by our resources reservation mechanism, QSRR, are always better than the ones provided by the CSMA protocol. These performances are expressed in terms of delay and throughput.

#### C.1. Comparison in term of delay

In a general manner, we notice that the delay provided by our resources reservation mechanism QSRR, is always lower than the one provided by CSMA, as shown in figure 1, figure 2 and figure 3, and this whatever the distribution of the applications (% of CBR and % of VBR\_RT applications) and whatever the number of nodes constituting our network.

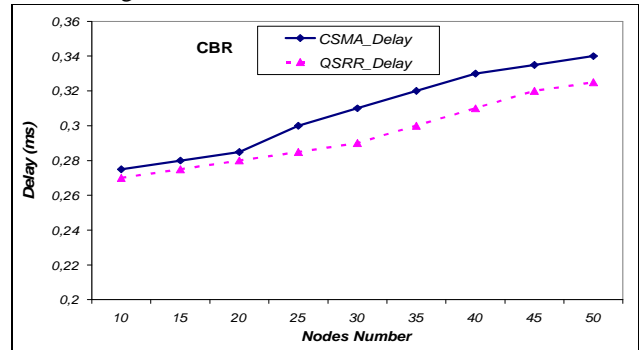


Figure 1. Delay evolution for applications 100% CBR & 0% VBR\_RT

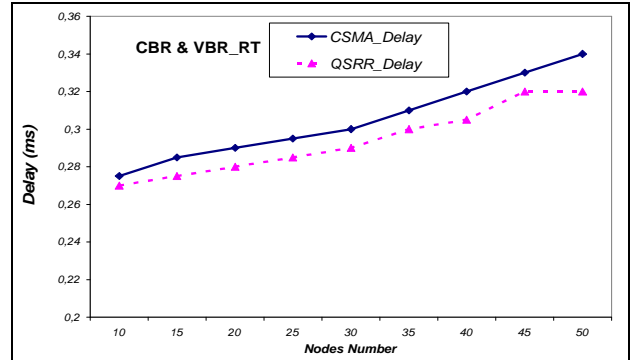


Figure 2. Delay evolution for applications 50% CBR & 50% VBR\_RT

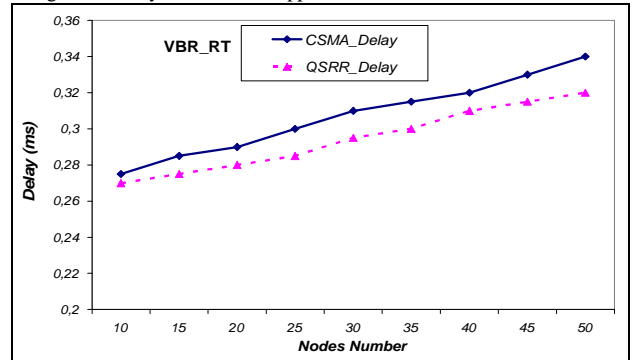


Figure 3. Delay evolution for applications 0% CBR & 100% VBR\_RT

For a given application distribution's, we notice that the delay increases with the increase of the number of nodes constituting the network, but the delay provided by QSRR remains always lower than the one provided by CSMA. The figure 1, figure 2 and figure 3 represent the QSRR and CSMA delay's evolution respectively for the application distribution 100%CBR and 0%VBR\_RT, 100%CBR and 0%VBR\_RT and finally 100%CBR and 0%VBR\_RT.

### C.2. Comparison in term of Throughput

In a general manner, we notice that the throughput provided by QSRR mechanism, is always higher than the one provided by the CSMA mechanism, as shown in figure 4, figure 5 and figure 6, and this whatever the distribution of the applications (% of CBR and % of VBR\_RT applications) and whatever the number of nodes constituting our network.

For a given application distribution's, we notice that the throughput increases with the increase of the number of nodes constituting the network, but the throughput provided by QSRR remains always higher than the one provided by CSMA. The figure 4, figure 5 and figure 6 represent the QSRR and CSMA throughput's evolution respectively for the application distribution 100%CBR and 0%VBR\_RT, 100%CBR and 0%VBR\_RT and finally 100% CBR and 0% VBR\_RT.

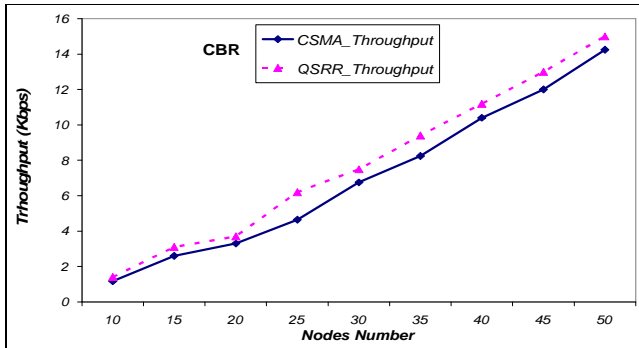


Figure 4. Throughput evolution for applications 100%CBR&0%VBR\_RT

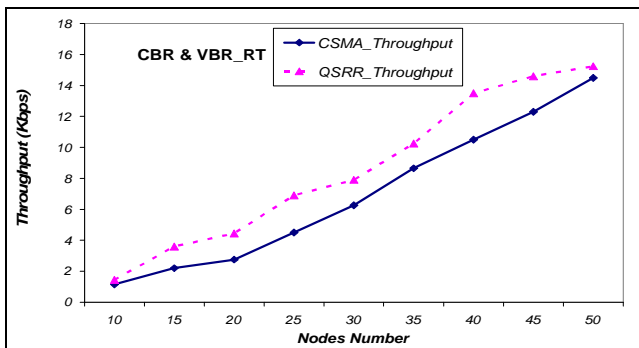


Figure 5. Throughput evolution for applications 50%CBR&50%VBR\_RT

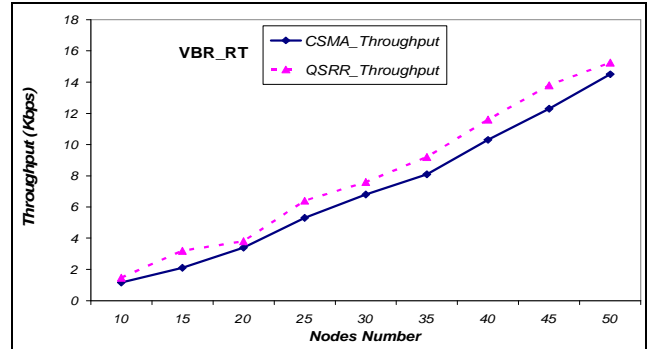


Figure 6. Throughput evolution for applications 0%CBR&100%VBR\_RT

## VI. CONCLUSION

In this paper, we focused on a novel proposition of resources reservation mechanism of the traffic submitted to the network with regard to its QoS characteristics by defining a relation between the required constraints of the applications. Our QoS resources reservation method, QSRR, provides us reserving network path that have sufficient resources to satisfy the QoS requirements of all admitted connections. In this sense, for each flow on which we have provided some QoS guarantee constraints (in term of delay or throughput), QSRR will allocate some resources which will be exclusively for its use. While the resources reservation is based on the available bandwidth, we have use, in QSRR, an efficient method to obtain a relation between the required delay and the required bandwidth. Finally, simulation analysis have been conducted and produced some performance evaluation results showing that the performances provided by QSRR (in terms of delay, load and throughput) are always better than the ones provided by CSMA.

## REFERENCES

- [1] T. Imienlinski and B. R. Badrinath 'Mobile wireless computing: solutions and challenges in data management'. CACM, October 1994.
- [2] M. S. Gast and O'Reilly, '802.11 Wireless networks: The definitive guide', 2002.
- [3] G. Pujolle, 'Les Réseaux', Troisième Edition, Eyrolles, 2002.
- [4] M. Mirhakkak, N. Schult, et D. Thomson. 'Dynamic Quality of Service for Mobile Ad Hoc Networks', Dans IEEE MobiHoc 2000, Boston, Massachusetts, USA, Août 2000.
- [5] Marie-Ange Remiche, 'ELEC 379 : Réseaux II II', Belgique, 2005.
- [6] Hassene Bouhouch et Sihem Guemara El Fatmi, "QoS Routing In Ad Hoc Networks by Integreting Activity in the OLSR Protocol" ICSNC, pp.1, Second International Conference on Systems and Networks Communications (ICSNC 2007), 2007
- [7] C. Sarr, C. Chaudet, G. Chelius and I. Guérin Lassous, 'ABE : Un protocole de réservation de bande passante pour les réseaux ad hoc basés sur IEEE 802.11', Technical Report, INSA-Lyon, France, 2008.
- [8] A. Johnsson, B. Melander and M. Björkman, 'Bandwidth Measurement in Wireless Network', Technical Report, Mälardalen University, Sweden, 2005.
- [9] N. Kettaf, H. Abouaissa, T. Vuđuong and P. Lorenz, 'A Cross Layer Control On-demand Routing Protocol for QoS Applications', IJCSNS International Journal of Computer Science and Network Security, Vol 6, N° 9B, September 2006.